



10-39 Tie-Down

- Steel construction/zinc finish
- 360° base rotation
- Available with/without mounting holes
- Available with/without drain holes
- 6,000 lbs. break strength capacity*
- 2,000 lbs working load limit*

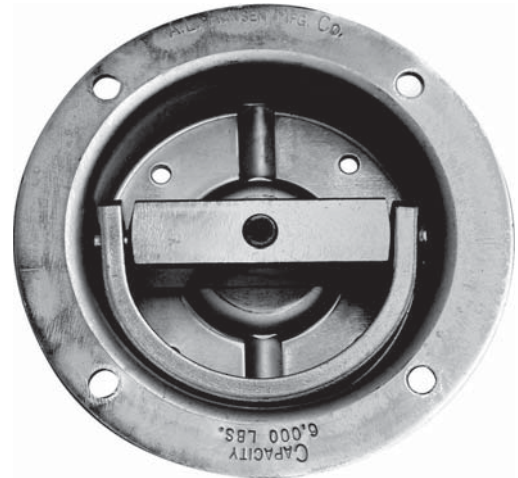

F10-39XXZNXX

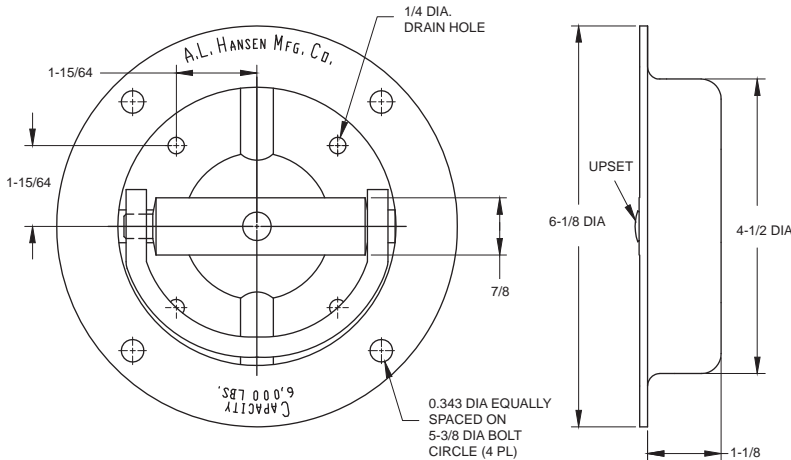


10-40 Tie-Down

- Steel construction/zinc finish
- 360° base rotation
- Available in stainless steel
- Available with/without mounting holes
- Available with/without drain holes
- 6,000 lbs. break strength capacity*
- 2,000 lbs working load limit*



F10-40XXZNXX

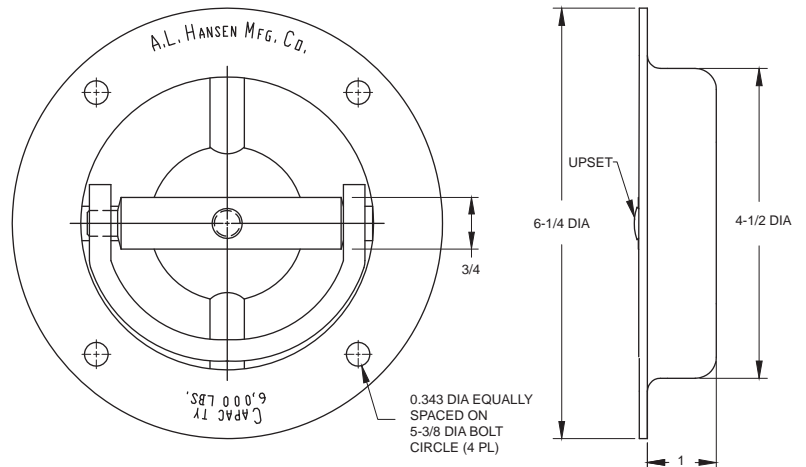

* **Rating Parameters:** To provide a reliability factor to manufacturers for the differences between static testing and dynamic (real world) loading on load securement components, rating parameters have been established. Breaking Strength Capacity is the maximum load that an assembly will withstand before failing. Working Load limit (WLL) is defined as the maximum load that a component or assembly should receive during regular use. WLL is typically calculated as one-third (1/3) of Breaking Strength Capacity. (CVSA/FHWA out of service criteria) A working knowledge of the breaking strength capacity & working load limit (WLL) in securement assemblies is necessary to properly securing a load.